

The Bolton Victory


Omni/Panel Cellular Booster

BOLTON | 
 TECHNICAL

BT459600-OP

The Victory increases voice, text, and 4G LTE data for homes and offices.

- Covers up to 4,000 sq. ft.
- Up to +4 dBi Gain outdoor omnidirectional antenna
- Best Kit for strong outside signal
- Better calls, data, and text
- Simple installation
- Works with all North American wireless carriers

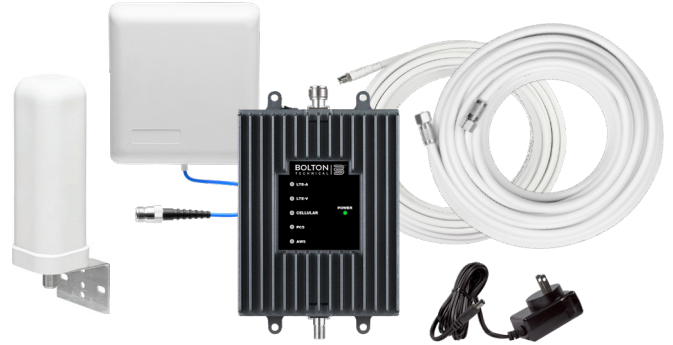

BOOSTER STUFF

| | | | | | |
|-------------------------|----------------------|---------|-----------------------|-----------------------|-----------|
| Uplink (MHz): | 698-716 | 776-787 | 824-849 | 1850-1915 | 1710-1755 |
| Downlink (MHz): | 728-746 | 746-757 | 869-894 | 1930-1995 | 2110-2155 |
| Input/Output Impedance: | 75Ω in / 50Ω out | | Power Consumption: | <15W | |
| Maximum Gain: | 72 dB | | Dimensions: | 7.9" x 5" x 1.2" | |
| VSWR: | ≤2.0 | | Weight: | 2 lb 3 oz. | |
| Gain Adjustment: | 20 dB (Automatic) | | AC Power: | Input AC 110V, 60 Hz; | |
| RF Connectors: | F Female (Outside) / | | | Output DC 5-15V | |
| | N Female (Inside) | | Maximum Output Power: | 1 Watt EIRP | |
| | | | Noise Figure: | 8 dB | |

WHAT'S IN THE BOX

| | |
|--------------------------------------------------------------|--------------|
| Bolton Victory Home Booster | BT459600 |
| Outside Omni Antenna "All Rounder" 50 Ohm | BT512372 |
| Inside Panel Antenna "Indoor Board" 50 Ohm - N-Female | BT512501 |
| Power Supply | BT459792 |
| 50 ft RG6 Cable - White Jacket - F-Male to F-Male (Outdoor) | SC-RG6-50 |
| 20 ft BT240 Cable - White Jacket - N-Male to N-Male (Indoor) | SC-004-20-NN |
| Connector: F-Female to N-Male | BT512020 |

LEGAL STUFF

Product Specifications may change without prior notice.

FCC ID / IC: RSNF4HOME / 7784A-F4HOME


QUESTIONS? CALL US TODAY
 888-987-2658


sales@boltontechnical.com



www.boltontechnical.com


 5010 Wright Road, Suite 115
 Stafford, TX, 77477
